

# Innovative living



MINIBAR  
FOR HOTEL

ProSeries





0.75kWh



ISO 9001:2008  
IECQ QC080000 (RoHS)



Comparing to other similar products in the market  
35% lower energy consumption  
96 kWh per year lower energy consumption  
26 kg per year lower carbon emissions

WELLWAY absorption type guest room minibars, all equipped with the latest II Generation Cooling System, accompanied with the latest energy-efficient electronic thermostat and optimized product design, achieve ultimate cooling performance with low energy consumption. The lowest energy consumption per day is only 0.75 kWh, tested by TUV.

## Low Energy Consumption

Manufacturer	The cooling system	Minibar Model	Product Class	Daily Consumption (ISO 15502)	Annual Consumption kWh/365days	Comparison of Annual Energy Consumption	Comparison of Annual Carbon Emission
Wellway	Absorption	XC-40C	40L	0.75 kWh/24h	273.75 kWh	0 kWh	0 kg
Similar Products in the Market	Absorption	X	40L	1.05 kWh/24h	369.75 kWh	+ 96.00 kWh	+26.00 kg
Low Quality Products	Absorption	X	40L	1.20 kWh/24h	438.00 kWh	+164.25 kWh	+44.48 kg

## New Technology



Made by high purity aluminum material with high thermal conductivity, the new cooling piece is more room saving and has 50% more surface dimension, leading to higher cooling efficiency and lower energy consumption.




Door-control LED internal light with low rated power



The new concealed thermal regulator behind the interior light, allows changing internal temperature setting without moving the items stored and allows switching off the minibar without plug out. It also prevents customers changing the setting arbitrarily.



The new designed II generation cooling unit's cooling effect and efficiency is 30% higher than other similar products.

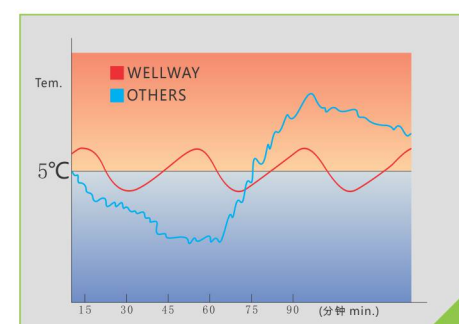

The new energy-saving electronic thermostat is able to achieve very accuracy in controlling cooling temperature, resulting in lower energy consumption. Temperature fluctuation is significantly smaller than those minibars with mechanical thermostat in the market.



Tempered glass shelves, safety and deluxe with plastic protection bar, avoiding drinks falling off

Different color of the glass door is available on request



Black (standard)



Ultramarine



Gray



White



The glass door includes 3 layer of tempered glass, really sealed,



Frost free and condensing free



Standard type



Embedded type



Cylinder type

Different kinds of handle are available on request





**XC-25B(S)**  
Vol.:25L

**XC-25B(G)**

Vol.:25L



#### Technical Data

Capacity (L): 25  
Dimension W x D x H (mm): 400 x 400(415) x 435  
Watts (W): 70  
Voltage (V): 220 ~ 240/100 ~ 110  
Cooling Temperature (°C): 4 ~ 6/7 ~ 9  
Energy Consumption (kWh/24h): 0.65(0.95)  
Net Weight (kg): 14.5(17)

#### Standard Feature


Innovativellgeneration cooling system  
Intelligent automatic defrost system  
Energy-saving & frost-free electronic thermostat system  
Concealed thermal regulator for convenient adjustment  
Door controlled LED light (magnet sensor)  
4 different sizes of door racks are available on request (0.2/0.3/0.5/1.5 L)  
Strong deluxe tempered glass shelf with stoppers x 1  
Reversible door opening direction  
100% green & HSF (Hazardous Substances Free)



**XC-30C(S)**  
Vol.:30L

**XC-30C(G)**

Vol.:30L

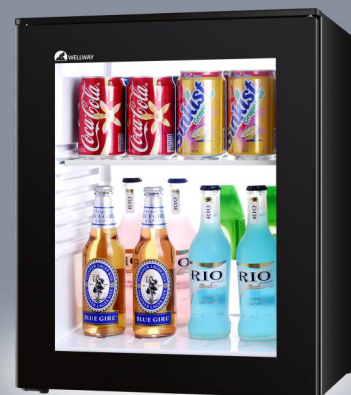

#### Technical Data

Capacity (L): 30  
Dimension W x D x H (mm): 400 x 410(420) x 500  
Watts (W): 70  
Voltage (V): 220 ~ 240/100 ~ 110  
Cooling Temperature (°C): 4 ~ 6/7 ~ 9  
Energy Consumption (kWh/24h): 0.70(1.1)  
Net Weight (kg): 15(18)

#### Standard Feature

Innovativellgeneration cooling system  
Intelligent automatic defrost system  
Energy-saving & frost-free electronic thermostat system  
Concealed thermal regulator for convenient adjustment  
Door controlled LED light (magnet sensor)  
4 different sizes of door racks are available on request (0.2/0.3/0.5/1.5 L)  
Strong deluxe tempered glass shelf with stoppers x 1  
Reversible door opening direction  
100% green & HSF (Hazardous Substances Free)



**XC-40C(S)**  
Vol.:40L

**XC-40C(S)**

Vol.:40L



#### Technical Data

Capacity (L): 40  
Dimension W x D x H (mm): 400 x 430(440) x 560  
Watts (W): 70  
Voltage (V): 220 ~ 240/100 ~ 110  
Cooling Temperature (°C): 4 ~ 6/7 ~ 9  
Energy Consumption (kWh/24h): 0.75(1.1)  
Net Weight (kg): 18(22)

#### Standard Feature

Innovativellgeneration cooling system  
Intelligent automatic defrost system  
Energy-saving & frost-free electronic thermostat system  
Concealed thermal regulator for convenient adjustment  
Door controlled LED light (magnet sensor)  
4 different sizes of door racks are available on request (0.2/0.3/0.5/1.5 L)  
Strong deluxe tempered glass shelf with stoppers x 2  
Reversible door opening direction  
100% green & HSF (Hazardous Substances Free)



**XC-60C(S)**  
Vol.:60L

**XC-60C(G)**

Vol.:60L



#### Technical Data

Capacity (L): 60  
Dimension W x D x H (mm): 490 x 490(500) x 580  
Watts (W): 85  
Voltage (V): 220 ~ 240/100 ~ 110  
Cooling Temperature (°C): 4 ~ 6/7 ~ 9  
Energy Consumption (kWh/24h): 0.95(1.25)  
Net Weight (kg): 21.5(25.5)

#### Standard Feature

Innovativellgeneration cooling system  
Intelligent automatic defrost system  
Energy-saving & frost-free electronic thermostat system  
Concealed thermal regulator for convenient adjustment  
Door controlled LED light (magnet sensor)  
2 different sizes of door racks are available on request (0.5/1.5 L)  
Strong deluxe tempered glass shelf with stoppers x 2  
Reversible door opening direction  
100% green & HSF (Hazardous Substances Free)



# Drawer Minibar

**BC50**

Vol.:45L



## Technical parameter

Capacity:45 L  
 Dimension: 550 x 514x 423 mm  
 (Wx Dx H) (Version1, depth include handle)  
 550 x 480x 423 mm  
 (Version2, depthwithout hotel door panel)  
 Watts: 65 W  
 Voltage: 220-240/ 100-115 V  
 Cooling T emperature: 5/ 8/ 12°C  
 Energy Efficiency Index: A+(EEI)  
 Energy consumption at8°C/25°C: 0.35 kWh/24h  
 Safety certification: GS, CCC,CB,



Large compartment of drawer for bottles and cans

- Soft-closing rail
- Prepared for fixing a hotel's wooden door panel and handle to match the in-room furnishing style
- Build-in design
- Super silent and efficient compressor cooling system
- Special energy saving system (Cool Preservation System, CPS), compressor cooling system

# Amenities



SWS-F14



E2042H



E2042G(B)



Model: AD-1201  
 Vol.: 1.2L  
 Current: AC220V, 50Hz  
 Color / material: SS 304, PVC  
 keep in 54°C



Model: I-H1261 (inluded kay)  
 Vol.: 0.6L  
 Current: AC220V, 50Hz  
 Color / material: Inox 304,  
 black PVC kay



Model: AYT 188

# Room status system

